

PF715F



Key Features

- Fanless i5, i3 or Celeron
- Perfect Flat, Bezel-Free Pure Glass
- Multi-Touch Screen
- Spill & Dust Resistant (IP66 standard)
- Can be mounted on stand, wall or pole (VESA 75 mm)
- Aluminum Die-Cast Stand & Casing
- External ports module for optimal cable management
- Three Year Warranty




The sturdy flexible stand offers a wide variety of usable positions, up to complete closure for easy transport.



The external ports module can be easily installed under the counter with the included bracket (Shown with optional powered USB ports).


Specifications - PF715F		
SYSTEM	Processor	Intel I5-6300U 2.4GHz 2-cores / Intel Celeron 3955U 2.0GHz 2-cores
	Memory	4Gb SoDIMM DDR4 Standard, up to 16Gb max.
	Storage	1x 2.5" HD or SSD
	Graphics	Intel CPU integrated graphics
	Security	Intel Firmware TPM
DISPLAY	Screen size / Ratio	15" 4:3
	Screen type / resolution	TFT-LED 1024x768
	Brightness	400nits
	Touch technology	True-flat PCAP 10-points multi-touch
	Protection	IP66 standard on front panel
CONNECTIVITY	2nd Display	USB connexion
	Serial	4x DB9 ports (0v, 5v, 12v)
	USB	4x USB 3.0, 4x USB 2.0
	Network	2x RJ45 Gigabit
	Audio	Audio-in and Audio-Out
	Power	External DC adapter
	Other	1x RJ11 cash drawer port (12v or 24v)
CERTIFICATIONS		CE, FCC, RoHS
OS SUPPORT		Windows 10
PHYSICAL	Material / Color	Metallic grey, die-cast aluminum
	Dimensions (LxWxH)	366mm x 282mm x 43mm (without stand)
	Net Weight	5.9 kg
	Operating Environment	0° ~ 40°C, 10% ~ 90% RH, non-condensing
	Storage Environment	Minus 20° ~ 60°C, 10% ~ 90% RH, non-condensing
WARRANTY		3-years
OPTIONS		MSR, customer-display, VFD

External Ports Module

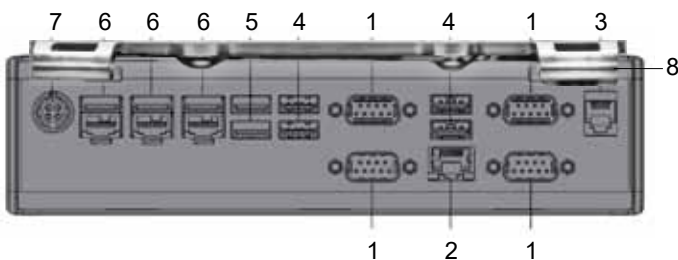

- 1 Serial
- 2 LAN
- 3 Cash Drawer
- 4 USB 2.0
- 5 USB 3.0
- 6 12v/24v PUSB (option)
- 7 19v DC
- 8 Support bracket

PF715F All-in-One

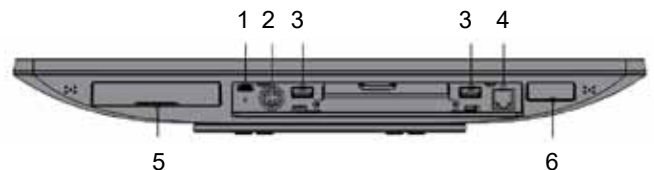

- 1 External Module Connector
- 2 19v DC
- 3 USB 3.0
- 4 LAN
- 5 HDD
- 6 Power switch